




UltraMB™ Model MBNL

Lead Free Globe Style Balancing Valve

(1/2", 3/4", 1")

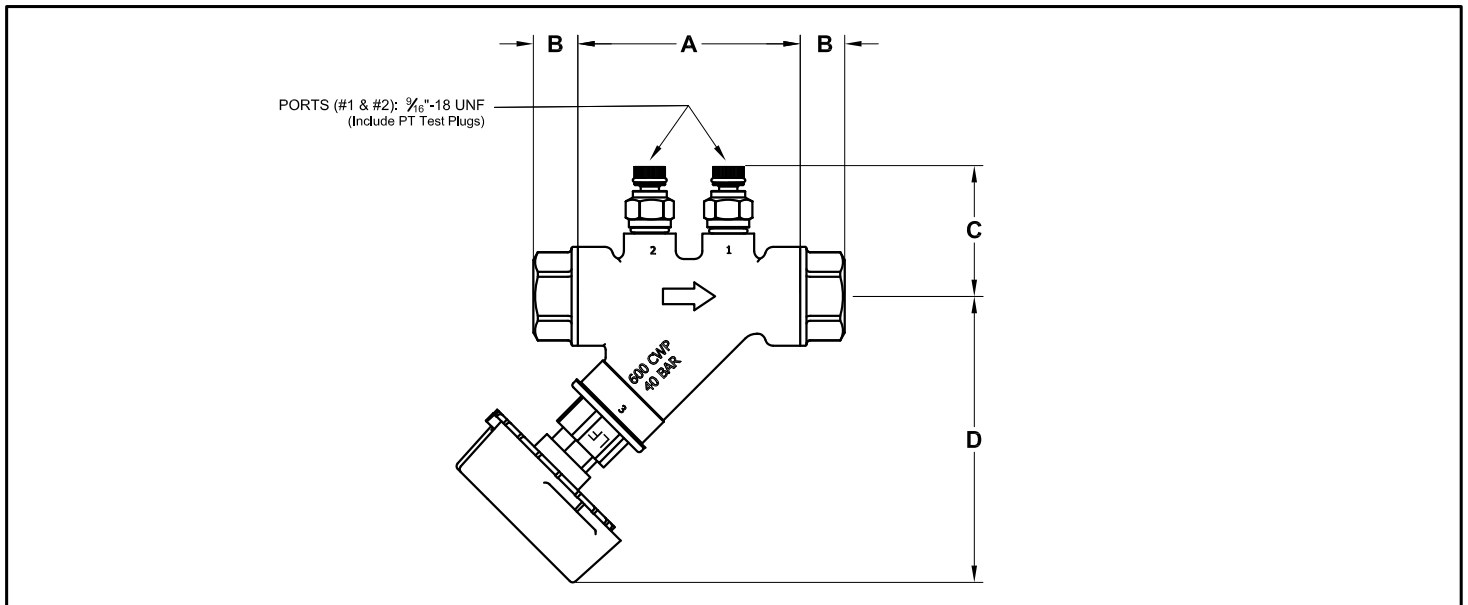

DIMENSIONS [inches]							
SIZE [inches]	Valve Body Size	A	B		C	D	WT ¹ [lbs] (Fixed Ends not included)
			F(NPT)	S(SWT)			
1/2	1	3.02	0.62	0.83	1.93	3.40	1.08
3/4	2	3.55	0.71	0.98	2.06	3.65	1.65
1	2	3.55	0.91	1.08	2.06	3.65	1.65

¹ Globe, Handle, and PT's included

FLOW RATE RECOMMENDATION GUIDE			
SIZE [inches]	IDEAL FLOW RANGES [gpm]		Handwheel Turns
	Min.	Max.	Max.
1/2	0.25	8.00	10
3/4, 1	0.45	18.00	10

MATERIALS & DESIGN DATA	
BODY, CAPLEAD FREE DZR BRASS, 600 CWP, 325°F
FIXED ENDSLEAD FREE DZR BRASS
CAP SEALFKM O-RING
BALANCING GLOBELEAD FREE DZR BRASS
HANDLENYLON, GLASS FILLED
ACCURACY±5%

UltraMB™ Model MBNL is tested and certified to NSF/ANSI/CAN 61 & 372 for Lead Free compliance.

ACCESSORIES			
Order Code	Part No.	Description	
	E ES-MTV. EXTENSION 3" O.A.L.	
	H HT. HANGING TAG with Model No., Location, Flow Rate (Maximum 7 Characters)	
	X PTE. PRES / TEMP TEST PLUG EXTENSION 1 1/8" O.A.L.	

ORDER DATA	
Sample Part #:	M B N L 1 - 0 5 0 F - 0 5 0 F - E X H
Model	_____
Size & Type - 1st FE	_____
Size & Type - 2nd FE	_____
PT Cap Option	_____
Option Order Codes	_____

PROJECT _____
 CONTRACTOR _____
 PO/JOB NO. _____
 ENGINEER _____
 REPRESENTATIVE _____
 DATE _____

Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.