


ByPass Kit™ Model BKFC

(1/2" thru 2")

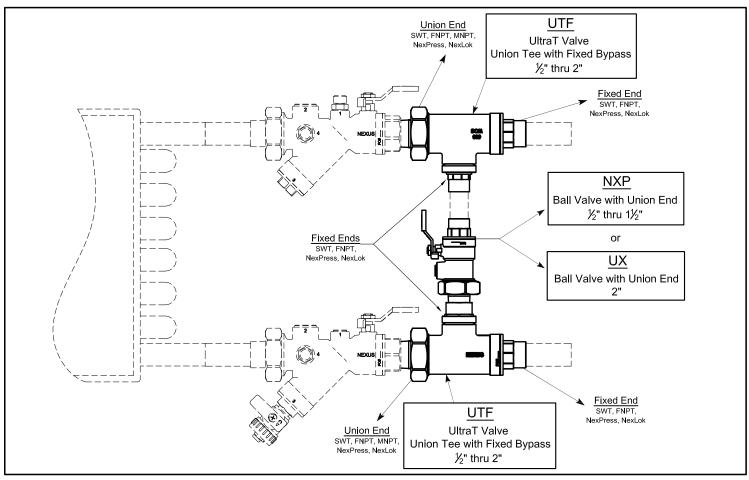

MATERIALS & DESIGN DATA BODIESHOT FORGED BRASS ASTM B283, 600 WOG, 325°F INTERCHANGEABLE UNION ENDS **END PIECES**HOT FORGED BRASS ASTM B283, NexPress: 200 PSIG, 250°F / NexLok: 250 PSIG, 200°F) / NexLok LD: 200 PSIG, 200°F HANDLE & NUTZINC PLATED / PVC COATED BALLHARD CHROME PLATED BRASS BALL SEALSTEFLONBRASS, BLOWOUT-PROOF SHAFT SHAFT SEALSDUAL FKM O-RINGS **UNION SEAL**FKM O-RING

ORDER DATA				
Sample Part #:				
BKFC2-100S-075S-G				
Model				
Valve Trim				
Sizes (Fixed Ends)				
Sizes (Union Ends)				
PT Cap Option (for PT Port Option)				
ByPass Valve Port Option				
Option Order Codes				

Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.

ACCESSORIES				
,		Order Code	Part No. Description	
to contact.		Н	HT. HANGING TAG with Model No., Location, Flow Rate (Maximum 7 Characters)	
		K	ES. EXTENSION KITS	
		L	SL. SHORT LEVER HANDLE	
		Р	PT-025. PRES / TEMP TEST PLUG 325°F, 1000 PSIG, ¼" MNPT	
		V	MV-025. MANUAL AIR VENT 325°F, 400 PSIG, ¼" MNPT, Side Discharge	

PROJECT
CONTRACTOR
PO/JOB NO.
ENGINEER
REPRESENTATIVE
DATE