
## **NEXUS**

## ByPass Kit™ Model BKUC

(1/2" thru 2")

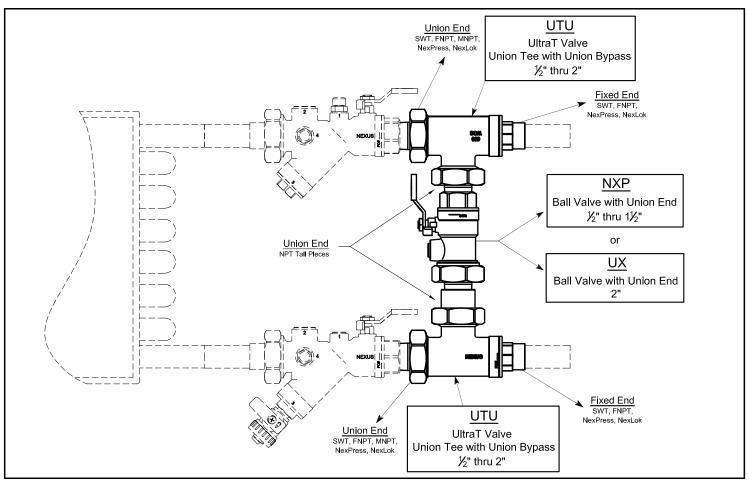

MATERIALS &	DESIGN DATA
BODIES	HOT FORGED BRASS ASTM B283, 600 WOG, 325°F INTERCHANGEABLE UNION ENDS
END PIECES	HOT FORGED BRASS ASTM B283, NexPress: 200 PSIG, 250°F / NexLok: 250 PSIG, 200°F) / NexLok LD: 200 PSIG, 200°F
HANDLE & NUT BALL BALL SEALS SHAFT SHAFT SEALS UNION SEAL	ZINC PLATED / PVC COATEDHARD CHROME PLATED BRASSTEFLONBRASS, BLOWOUT-PROOFDUAL FKM O-RINGSFKM O-RING

Sa	mple i	Part #	<u>!</u> :											
В	ΚU	C 2	- 1 (	0	s	- 0	7	5	s	-	G			
	<del></del>			T			_		_	Y	Y	_	_	
Мо	odel <sup>]</sup>													
Va	Ive Tri	n												
Siz	es (Fix	ed Er	ıds) —											
Siz	es (Un	ion Er	nds) —											
РΤ	Cap C	ption	(for P7	Po	rt O	otion	ı) —							
Byl	Pass V	′alve F	ort Op	tior	· —									
On	tion O	der C	odes -											

Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.

ACCESSORIES							
		Order Code	Part No. Description				
Op rathers		Н	HT. HANGING TAG with Model No., Location, Flow Rate (Maximum 7 Characters)				
		K	ES. EXTENSION KITS				
		L	SL. SHORT LEVER HANDLE				
		Р	PT-025. PRES / TEMP TEST PLUG 325°F, 1000 PSIG, X" MNPT				
		V	MV-025. MANUAL AIR VENT 325°F, 400 PSIG, X" MNPT, Side Discharge				

PROJECT
CONTRACTOR
PO/JOB NO.
ENGINEER
REPRESENTATIVE
DATE