




NEXUS

UltraMB™ Model MBFV

Manual Flow Control Valve

(2½" thru 12")

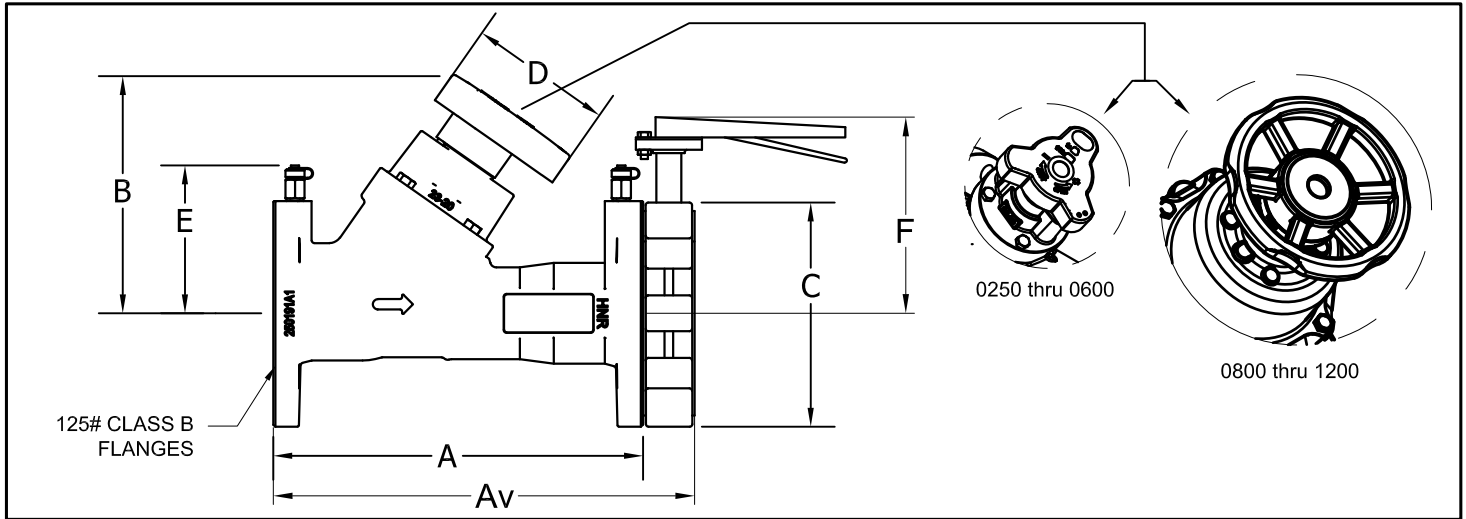

DIMENSIONS [inches]

SIZE [inches]	A	Av	B	C	D	E	F	WT. [lbs]	
								MBF	Butterfly Valve
2½	11.42	13.22	7.68	7.00	5.00	4.60	8.3	27.7	11.5
3	12.20	14.00	8.35	7.50	5.00	4.88	8.4	34.3	12.0
4	13.78	15.78	9.00	9.00	5.00	5.60	9.2	46.9	18.6
5	15.75	17.85	9.90	10.00	5.00	6.12	9.5	66.0	22.5
6	18.90	21.10	11.30	11.00	5.00	6.75	10.2	95.7	24.5
8	23.62	26.02	19.69	6.70	7.87	7.87	13.2	184.8	49.5
10	28.74	31.34	20.67	7.97	12.20	9.37	14.5	349.8	72.0
12	33.46	36.56	21.06	9.06	12.20	10.24	16.3	463.1	95.0

Notes: * - Model BV-0600 / BV-0600-GB

FLOW RATE RECOMMENDATION GUIDE

SIZE [inches]	IDEAL FLOW RANGES [GPM]		Handwheel Turns
	Min.	Max.	Max. (functional)
2½	1.1	160.0	9
3	1.6	240.0	9
4	2.2	400.0	8
5	3.8	560.0	7.5
6	17.0	800.0	8.5
8	50.0	2,000.0	13
10	30.0	2,600.0	11
12	31.0	3,200.0	11

BASIC INSTALLATION NOTES

- CAN BE ROTATED ±90° IN-LINE (HANDWHEEL ON TOP POSITION)
- CAN BE MOUNTED HORIZONTALLY OR VERTICALLY
- REQUIRES A MINIMUM OF 5 STRAIGHT PIPE DIAMETERS UPSTREAM
- REQUIRES A MINIMUM OF 2 STRAIGHT PIPE DIAMETERS DOWNSTREAM
- 125# CLASS B FLANGES ALSO MATE TO 150# FLANGES
- MBFV SHIPS WITH BUTTERFLY VALVE INSTALLED HAND TIGHT
- BUTTERFLY VALVE MAY BE ROTATED 90° FOR PT PORT ACCESS

ORDER DATA

Sample Part #:

MBFV-0400-

Model

Size

Option Order Code (HT)

Option Order code (GB)

Option Order code (PTE)

MATERIALS & DESIGN DATA

BODYCAST IRON, ASTM A126, CLASS B 232 PSIG, 250°F STANDARD 125# CLASS B FLANGES
CAPCAST IRON (2½" thru 8"), DUCTILE IRON (10" & 12")
LIMITING SCREWBRASS C36000
STEMBRASS C36000 (2½" thru 8"), BRASS C37700 (10" & 12")
RETAINING RINGBRASS, ASTM B16 C36000
SPRINGSTAINLESS STEEL 302
O-RINGSEPDM
HANDWHEELPOLYAMIDE (2½" thru 6"); STEEL, EPOXY COATED (8" thru 12")
POSITION INDICATORPOLYAMIDE (2½" thru 8"); NYLON (10" & 12")
OBTURATORCOMPOSITE
SEALEPDM
SCREWSSTAINLESS STEEL
GLOBERYTON (PPS)
BUTTERFLY VALVEEPOXY COATED CAST IRON, ASTM A126, CLASS B, LUG TYPE BUTTERFLY VALVE, 225 PSIG, 250°F, 304 STAINLESS STEEL DISK, 416 STAINLESS STEEL SHAFT
BOLTSZINC PLATED STEEL
ACCURACY±5%

ACCESSORIES

Order Code	Part No.	Description
<input type="checkbox"/> GB BV-0600GB.	GEARBOX WITH HAND WHEEL (for 6" only)
<input type="checkbox"/> H HT.	HANGING TAG with Model No., Location (Maximum 7 Characters)
<input type="checkbox"/> X PTE.	PRES / TEMP TEST PLUG EXTENSION 1½" O.A.L.

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____

For part numbers and ordering information please consult the "Ordering Guide" section in Nexus Catalog.