



# Ballorex Thermoelectric Actuators

(½" thru 1")

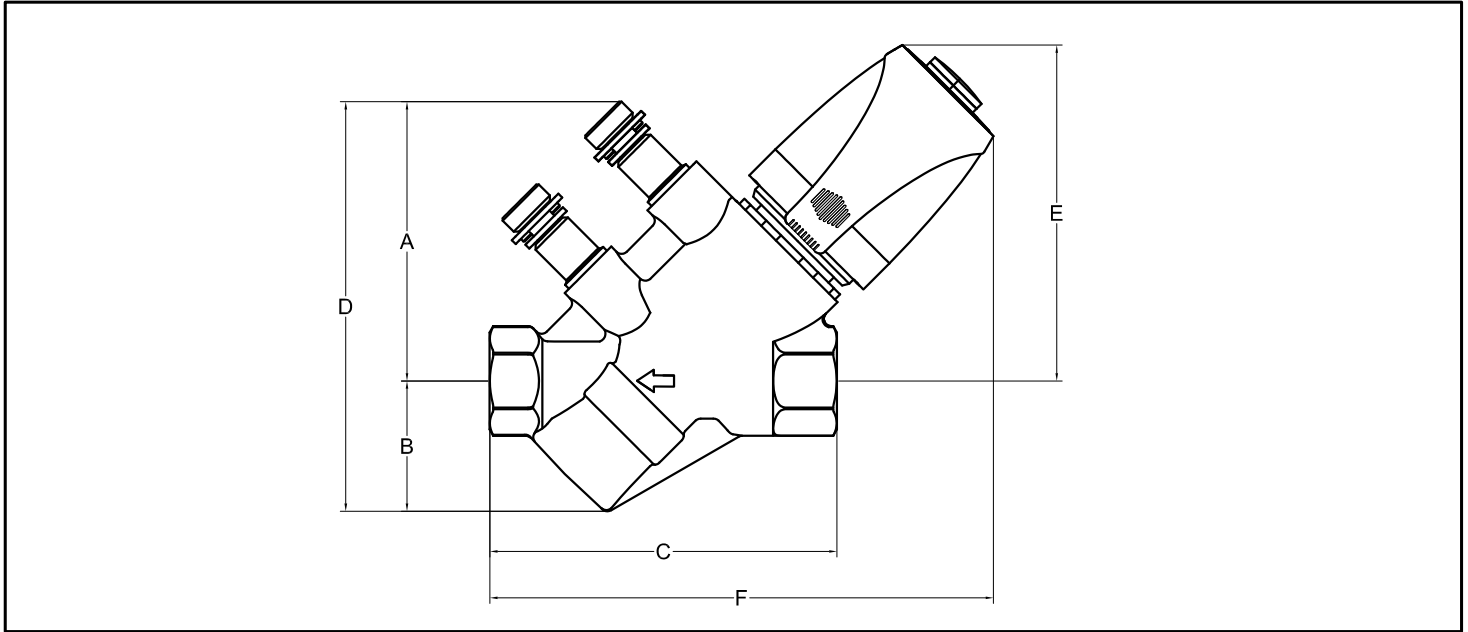

## Modulating actuator 24 V

### Dimensions

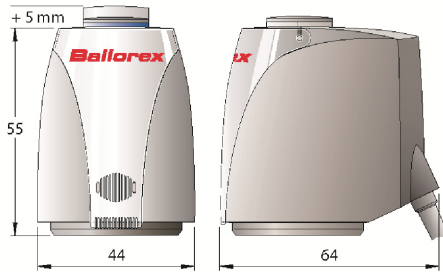


### Specifications

Operating voltage	24 V AC, 50-60 Hz
Base position	Normally closed
Operating power	2 W
Average actuation delay	30 s/mm
Control voltage	0-10 V DC
Actuator travel	4 mm
Actuating force	22.5 lbs
Ambient temperature	0 to +140°F
Protection class	IP54
UL conformity	UL 60730
Connecting cable	White/1 m/30 g

## ON/OFF actuator 24 V

### Dimensions

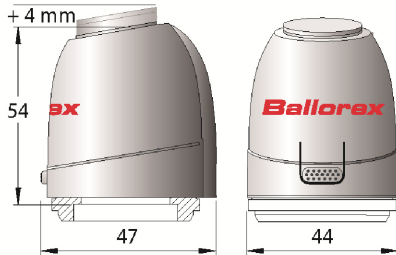

### Specifications

Operating voltage	24 V AC/DC, 0-60 Hz
Base position	Normally closed
Operating power	1.8 W
Closing and opening times	approx. 3 min.
Actuating force	22.5 lbs
Ambient temperature	0 to +140°F
Protection class	IP54
UL conformity	UL 60730
Connecting cable	Grey/1 m

### DIMENSIONS [inches]

MODEL	SIZE	A	B	C	D	E	F
ND050	½"	2.99	1.38	3.74	4.37	3.62	5.43
ND075	¾"	3.27	1.93	4.72	5.20	4.36	6.76
ND100	1"	3.19	2.20	5.00	5.39	5.09	5.77

### ORDER DATA

PROJECT \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 PO/JOB NO. \_\_\_\_\_  
 ENGINEER \_\_\_\_\_  
 REPRESENTATIVE \_\_\_\_\_  
 DATE \_\_\_\_\_