Dynamic™ Model ND

Submittal Schedule

(½" thru 2")

FLOW RATE SELECTION GUIDE

SIZE	FLOW SELECTOR	COLOR	FLOW RANGE GPM	Cv*
ND050-L	DC050L	White	0.15 - 0.52	0.27
ND050-S	DC050S	Red	0.39 - 1.98	0.90
ND050-H	DC050H	Black	1.32 - 6.16	2.89
ND075-S	DC075S	White	1.41 - 3.88	2.20
NC075-H	DC075H	Black	3.67 - 9.77	5.43
ND100-S	DC100S	White	3.80 - 10.30	5.84
ND100-H	DC100H	Black	7.70 - 14.66	9.54
ND125-H	DC125H	Black	8.40 - 19.37	9.65
ND150-S	DC150S	White	16.16 - 33.29	20.20
ND200-H	DC200H	Black	22.81 - 55.48	34.10

** Cv used for Flow verification*

ACCESSORIES

H .... HT. HANGING TAG
with Model No., Location *(Maximum 7 Characters)*

_ .... MODULATING ACTUATOR 24 V
(0-10 V Control Voltage)

_ .... TWO POSITION ACTUATOR 24 V
(0-10 V Control Voltage)

X .... PTE. PRES / TEMP TEST PLUG EXTENSION
1 9/16" O.A.L.

@ .... PTEB. PRES / TEMP TEST PLUG EXTENSION
1 9/16" O.A.L.

Item	Qty.	GPM	Model Designation	Tagging Information *(Maximum 7 Characters)*

ORDER DATA

Sample Part #:

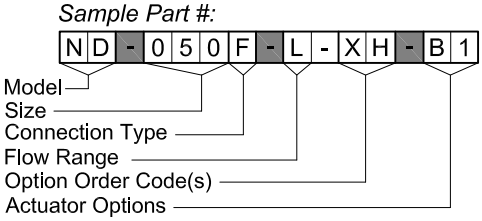

For part numbers and ordering information please consult the "Ordering Guide" section in Nexus Catalog.

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____

Copyright © 2015 Nexus Valve, Inc. All Rights Reserved (Rev: 04/08/19)