UltraMB™

Models MBF, MBFV, MBG, MBGV, MBT, MBTV

Submittal Schedule (2½" thru 6")

FLOW RATE RECOMANDATION GUIDE		
SIZE (Inches)	IDEAL FLOW RANGES (GPM)	
	Min.	Max.
2½	4	150
3	4	200
4	8	300
5	5	500
6	20	1000

ACCESSORIES

GB .... BV-0600GB. GEARBOX WITH HAND WHEEL
(for 6" only)

H .... HT. HANGING TAG
with Model No., Location, Flow Rate
(Maximum 7 Characters)

X .... PTE. PRES / TEMP TEST PLUG EXTENSION
1 9/16" O.A.L.

Item	Qty.	GPM	Model Designation	Tagging Information *(Maximum 7 Characters)*

ORDER DATA

Sample Part #:

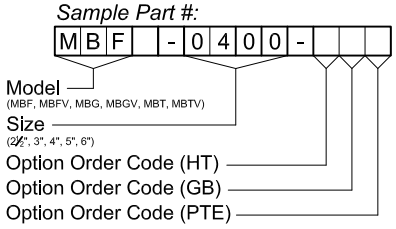

Please consult the Ordering Guide in the Nexus Valve catalog for complete part number and ordering information.

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____

Copyright © 2009 Nexus Valve, Inc. All Rights Reserved (Rev: 02/23/18)