



NEXUS Butterfly Valve Model BVT Threaded Ends D. (1)

 $(2\frac{1}{2}")$

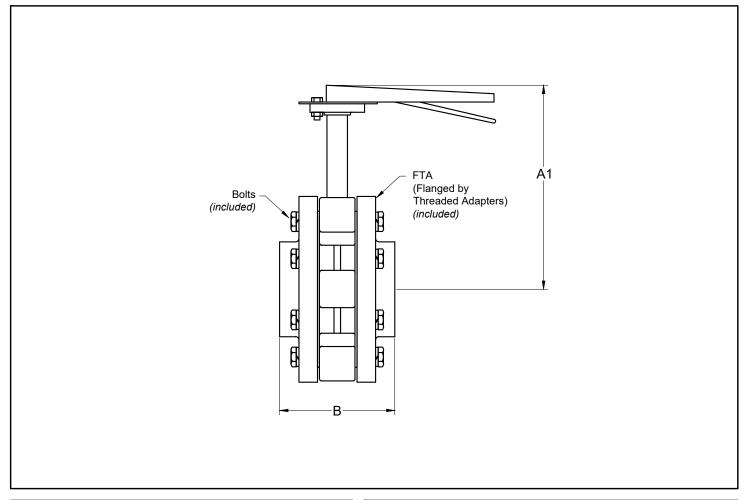

DIMENSIONS [inches]						
SIZE	A1	В	Flange	Cv (Full Open)	WT [lbs]	
					Butterfly Valve	FTA ¹
21/2	8.2	5.4	FTA - 250	220	10.7	15.5
Note: 1 Weight for 2 Threaded Adapters w/ Hardware						



MATERIALS & DESIGN DATA

VALVE BODY:EPOXY COATED DUCTILE IRON, ASTM A126,

CLASS B, 175 PSIG, 250°F

DISK:316 STAINLESS STEEL (CF8M)

SHAFT:410 STAINLESS STEEL

TOP PLATE:STAINLESS STEEL

THREADED ADAPTERS:DUCTILE IRON, ASTM A395, 175 PSIG, 250°F,

STANDARD 125# CLASS B FLANGES (ALSO MATE TO 150# FLANGES)

PROJECT _____ CONTRACTOR _____ PO/JOB NO. ENGINEER _____ REPRESENTATIVE _____ DATE .