Coil Pak™ N2X

(½" thru 1½")

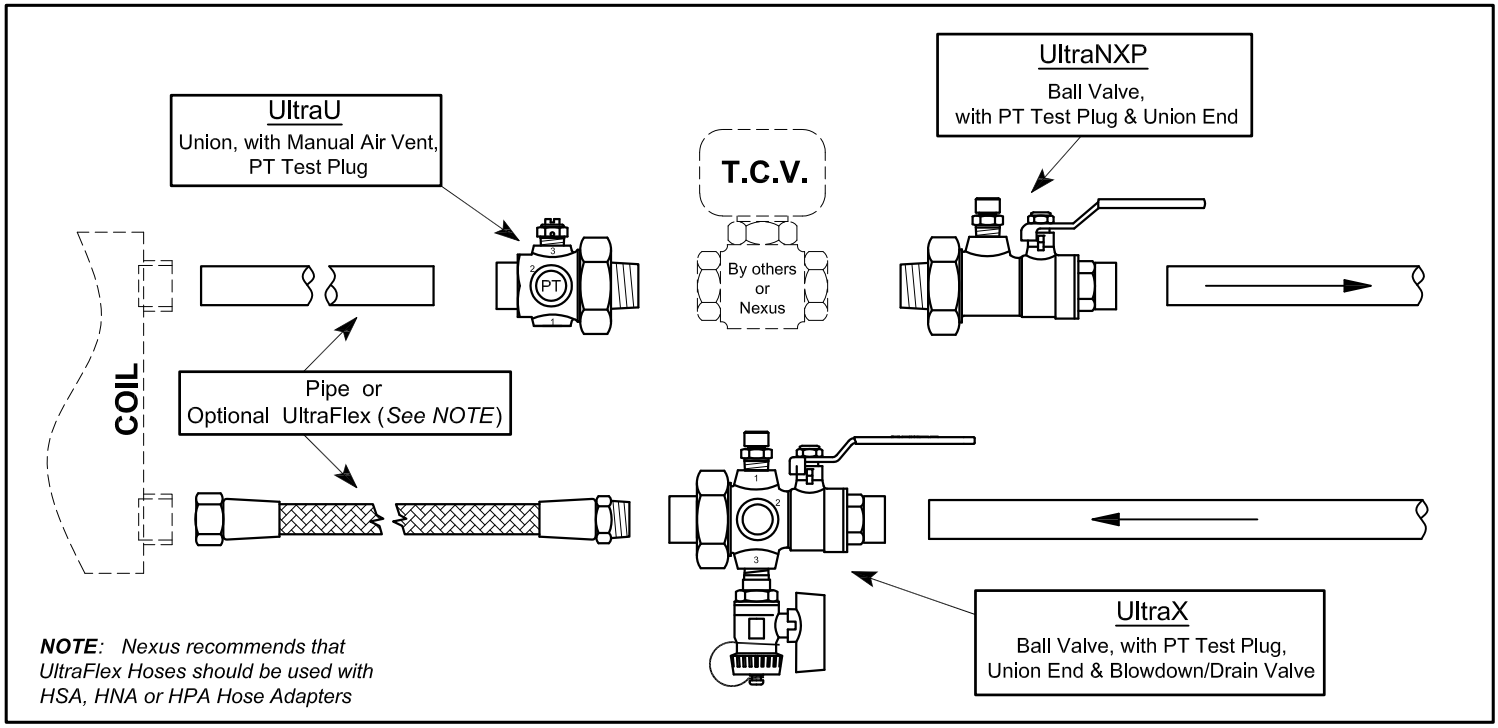

***NOTE**: Nexus recommends that UltraFlex Hoses should be used with HSA, HNA or HPA Hose Adapters*

MATERIALS & DESIGN DATA

BODIES, END PIECES	.....HOT FORGED BRASS ASTM B283 FNPT, SWT, NexPress, NexLok 600 WOG, 325°F (NexPress: 200 PSIG, 250°F / NexLok: 250 PSIG, 200°F), INTERCHANGEABLE UNION ENDS
HANDLES & NUTS	.....ZINC PLATED / PVC COATED
BALLS	.....HARD CHROME PLATED BRASS / STAINLESS STEEL (optional)
BALL SEALS	.....TEFLON
SHAFTS	.....BRASS / STAINLESS STEEL (optional) BLOWOUT-PROOF SHAFT
SHAFT SEALS	.....DUAL FKM O-RINGS
UNION SEALS	.....FKM O-RING
HOSE SPECS	.....400 PSI (½" thru 1"), 248°F 300 PSI (1¼" thru 1½"), 248°F
HOSE CORE	.....REINFORCED EPDM
HOSE BRAID	.....STAINLESS STEEL
HOSE FITTINGS	.....BRASS OT58
HOSE GASKET	.....EPDM

ACCESSORIES

	Order Code	Part No. Description
☐	C	.... CV-1, CV-2. CHECK VALVE CV-1 for ½", ¾"LO & 1"LO CV-2 for ¾"STD, 1"STD & 1¼"LO; Center Guided, Non-Slam Check
☐	H	.... HT. HANGING TAG with Model No., Location, Flow Rate *(Maximum 7 Characters)*
☐	K	.... ES. EXTENSION KITS
☐	L	.... SL. SHORT LEVER HANDLE
☐	M	.... MS-1. MEMORY STOP 304 stainless steel
☐	M	.... HNA. HOSE ADAPTER. Straight and MNPT pipe threads
☐	S	.... HSA. HOSE ADAPTER. Straight pipe threads and Sweat end
☐	P	.... HPA. HOSE ADAPTER. Straight pipe threads and NexPress end
☐	T	.... T.C.V. Handling (TC) & Hard Piped (CC) (See TCV Catalog for Order Codes)

ORDER DATA

Sample Part #:

N	2	X	-	1	0	0	L	S	M	1	C	0	M	0						

Model
Valve Trim
Coil Pak Size
Branch Line
Connection to TCV
Connection to Coil
Hose Adapters (Con. Type & Red. Code)
Accessory Cap Option
Option Order Codes (Accessories)

Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____

Copyright © 2009 Nexus Valve, Inc. All Rights Reserved (Rev: 12/12/14)