




Hose Adapters

Models HSA, HNA, HLA

(1/2" thru 2")

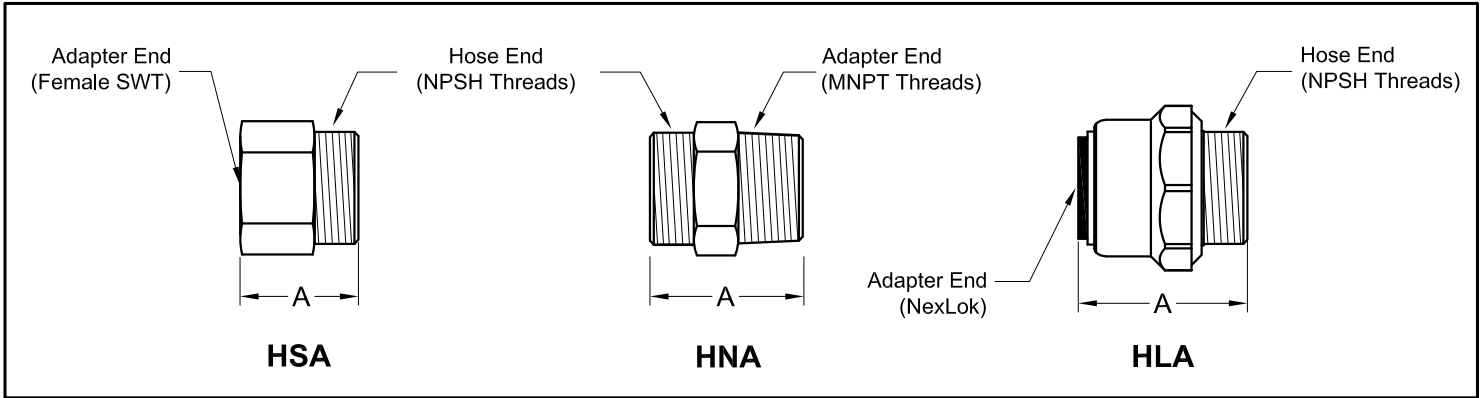

Part #	Hose End NPSH	Adpt. End Fem. SWT, MNPT, NexLok	A	HEX/ OCT	WT [lbs]
HSA-050	1/2"	1/2"	1.00"	7/8"	0.09
HSA-050-038	1/2"	3/8"	0.75"	5/8"	0.05
HSA-075	3/4"	3/4"	1.25"	1 1/16"	0.14
HSA-075-050	3/4"	1/2"	0.88"	3/4"	0.08
HSA-100	1"	1"	1.50"	1 3/8"	0.28
HSA-100-050	1"	1/2"	0.87"	3/4"	0.13
HSA-100-075	1"	3/4"	1.31"	1 3/8"	0.29
HSA-125	1 1/4"	1 1/4"	1.47"	1 3/4"	0.20
HSA-125-075	1 1/4"	3/4"	1.09"	1 1/16"	0.20
HSA-125-100	1 1/4"	1"	1.25"	1 3/8"	0.24
HSA-150	1 1/2"	1 1/2"	1.69"	2"	0.35
HSA-200	2"	2"	2.11"	2 1/2"	0.57
HNA-050	1/2"	1/2"	1.33"	7/8"	0.10
HNA-075	3/4"	3/4"	1.65"	1 1/16"	0.27
HNA-075-050	3/4"	1/2"	1.38"	1 1/16"	0.15
HNA-100	1"	1"	1.80"	1 3/8"	0.38
HNA-100-050	1"	1/2"	1.44"	1 3/8"	0.11
HNA-100-075	1"	3/4"	1.61"	1 3/8"	0.33
HNA-125	1 1/4"	1 1/4"	1.88"	1 3/4"	0.37
HNA-125-075	1 1/4"	3/4"	1.61"	1 1/4"	0.38
HNA-125-100	1 1/4"	1"	1.80"	1 3/8"	0.45
HNA-150	1 1/2"	1 1/2"	2.03"	2"	0.50
HNA-200	2"	2"	2.21"	2 1/2"	0.76
HLA-050	1/2"	1/2"	1.20"	1.10"	0.12
HLA-075	3/4"	3/4"	1.29"	1.40"	0.29
HLA-100	1"	1"	1.66"	1.69"	0.40

MATERIALS & DESIGN DATA

Machined from solid brass, these adapters provide superior connectivity between Nexus UltraFlex female swivel hose ends and NPT pipe fittings or copper tubing. The UltraFlex hose end, where the Hose Adapters can be threaded in, has swivel fitting with NPSH (straight pipe) threads, and gasket.

All threaded ends (including NPT) have faces that are machined true and flat for maximum sealing performance against gaskets.

ORDER DATA

QTY	Part #	QTY	Part #	QTY	Part #
	HSA-050		HSA-125-100		HNA-125
	HSA-050-038		HSA-150		HNA-125-075
	HSA-075		HSA-200		HNA-125-100
	HSA-075-050		HNA-050		HNA-150
	HSA-100		HNA-075		HNA-200
	HSA-100-050		HNA-075-050		HLA-050
	HSA-100-075		HNA-100		HLA-075
	HSA-125		HNA-100-050		HLA-100
	HSA-125-075		HNA-100-075		

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____