

NEXUS

Hose Pak™ XYH

 $(\frac{1}{2}$ " thru 1"STD)

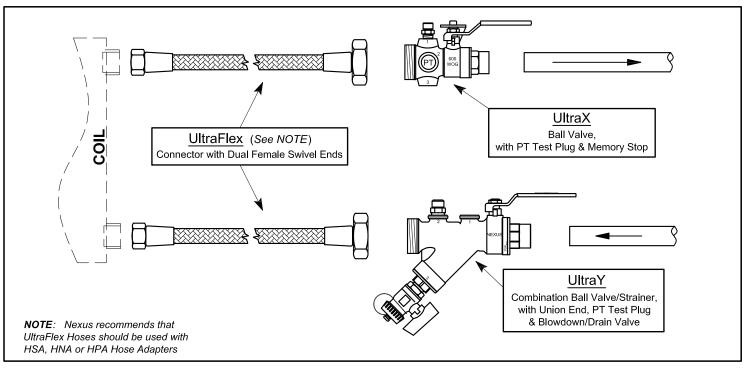

MATERIALS & DESIGN DATA BODIES, END PIECESHOT FORGED BRASS ASTM B283 FNPT, SWT, NexPress, NexLok 600 WOG, 325°F (NexPress: 200 PSIG, 250°F / NexLok: 250 PSIG, 200°F), INTERCHANGEABLE UNION ENDS FILTER SCREEN (UY)304 STAINLESS STEEL, 20 MESH / 40 MESH (optional)ZINC PLATED HANDLES & NUTSHARD CHROME PLATED BRASS / **BALLS** STAINLESS STEEL (optional) BALL SEALSTEFLON **SHAFTS**BRASS / STAINLESS STEEL (optional) SHAFT SEALSDUAL FKM O-RINGS UNION SEALSFKM O-RINGFKM O-RING CAP SEAL (UY) HOSE SPECS400 PSI, 248°FREINFORCED EPDM HOSE CORESTAINLESS STEEL HOSE BRAID **HOSE FITTINGS**BRASS OT58 HOSE GASKETEPDM

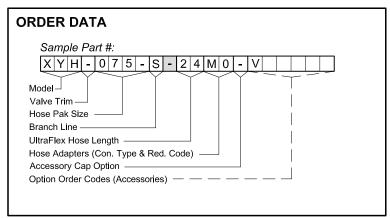


Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.

ACCESSORIES							
_		Order Code	Part No. Description				
		С	CV-1, CV-2. CHECK VALVE CV-1 for ½", ¾"LO & 1"LO; CV-2 for ¾"STD, 1"STD & 1½"LO; Center Guided, Non-Slam Check				
(JE) K.		Н	HT. HANGING TAG with Model No., Location, Flow Rate (Maximum 7 Characters)				
		К	ES. EXTENSION KITS				
		L	SL. SHORT LEVER HANDLE				
		М	HNA. HOSE ADAPTER. Straight and MNPT pipe threads				
		S	HSA. HOSE ADAPTER. Straight pipe threads and Sweat end				
		N	HPA. HOSE ADAPTER. Straight pipe threads and NexPress end				
		V	MV-025. MANUAL AIR VENT 325°F, 400 PSIG, X₁" MNPT, Side Discharge				

PROJECT
CONTRACTOR
PO/JOB NO.
ENGINEER
REPRESENTATIVE
DATE

Hose Pak™ XYH

 $(1\frac{1}{4}$ "LO thru $2\frac{1}{2}$ ")

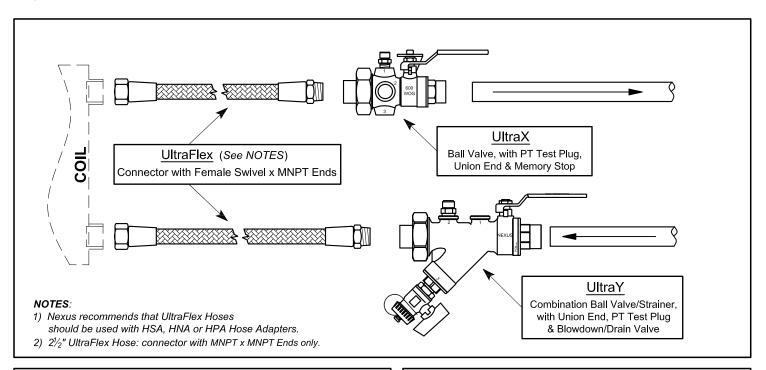

MATERIALS & DESIGN DATA

BODIES, END PIECES	HOT FORGED BRASS ASTM B283
	(CAST BRASS: UY (2", $2\frac{1}{2}$ ")),
	FNPT, SWT, NexPress, NexLok
	600 WOG, 325°F (NexPress: 200 PSIG, 250°F /
	NexLok: 250 PSIG, 200°F),
	INTERCHANGEABLE UNION ENDS
FILTER SCREEN (UY)	304 STAINLESS STEEL,
	20 MESH / 40 MESH (optional)
HANDLES & NUTS	ZINC PLATED
BALLS	HARD CHROME PLATED BRASS /
	STAINLESS STEEL (optional)
BALL SEALS	TEFLON
SHAFTS	BRASS / STAINLESS STEEL (optional)
	BLOWOUT-PROOF SHAFT
SHAFT SEALS	DUAL FKM O-RINGS
UNION SEALS	FKM O-RING
CAP SEAL (UY)	FKM O-RING
HOSE SPECS	300 PSI (1¼" thru 2"), 248°F
	400 PSI (2½"), 70°F
HOSE CORE	REINFORCED EPDM
HOSE BRAID	STAINLESS STEEL
HOSE FITTINGS	BRASS OT58
HOSE GASKET	EPDM

ORDER DATA	4											
Sample Par	t #:											
X Y H -	1 5 C	s -	2	4	М	0	-	٧				
Model Valve Trim Hose Pak Size Branch Line UltraFlex Hose Le Hose Adapters (C Accessory Cap O Option Order Cod	on. Typ ption —		ode) -							-	

Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.

ACCESS	ORIE	S	
		Order <u>Code</u>	Part No. Description
Ultrax.		Н	HT. HANGING TAG with Model No., Location, Flow Rate (Maximum 7 Characters)
		K	ES. EXTENSION KITS
		L	SL. SHORT LEVER HANDLE
		М	HNA. HOSE ADAPTER. Straight and MNPT pipe threads
		S	HSA. HOSE ADAPTER. Straight pipe threads and Sweat end
		N	HPA. HOSE ADAPTER. Straight pipe threads and NexPress end
		٧	MV-025. MANUAL AIR VENT 325°F, 400 PSIG, ¼" MNPT, Side Discharge
I			

PROJECT
CONTRACTOR
PO/JOB NO
FNGINER
REPRESENTATIVE
DATE

(Rev. 12/12/14)