




Meter Kit Model MKA

(for Automatic Flow Control Valves)

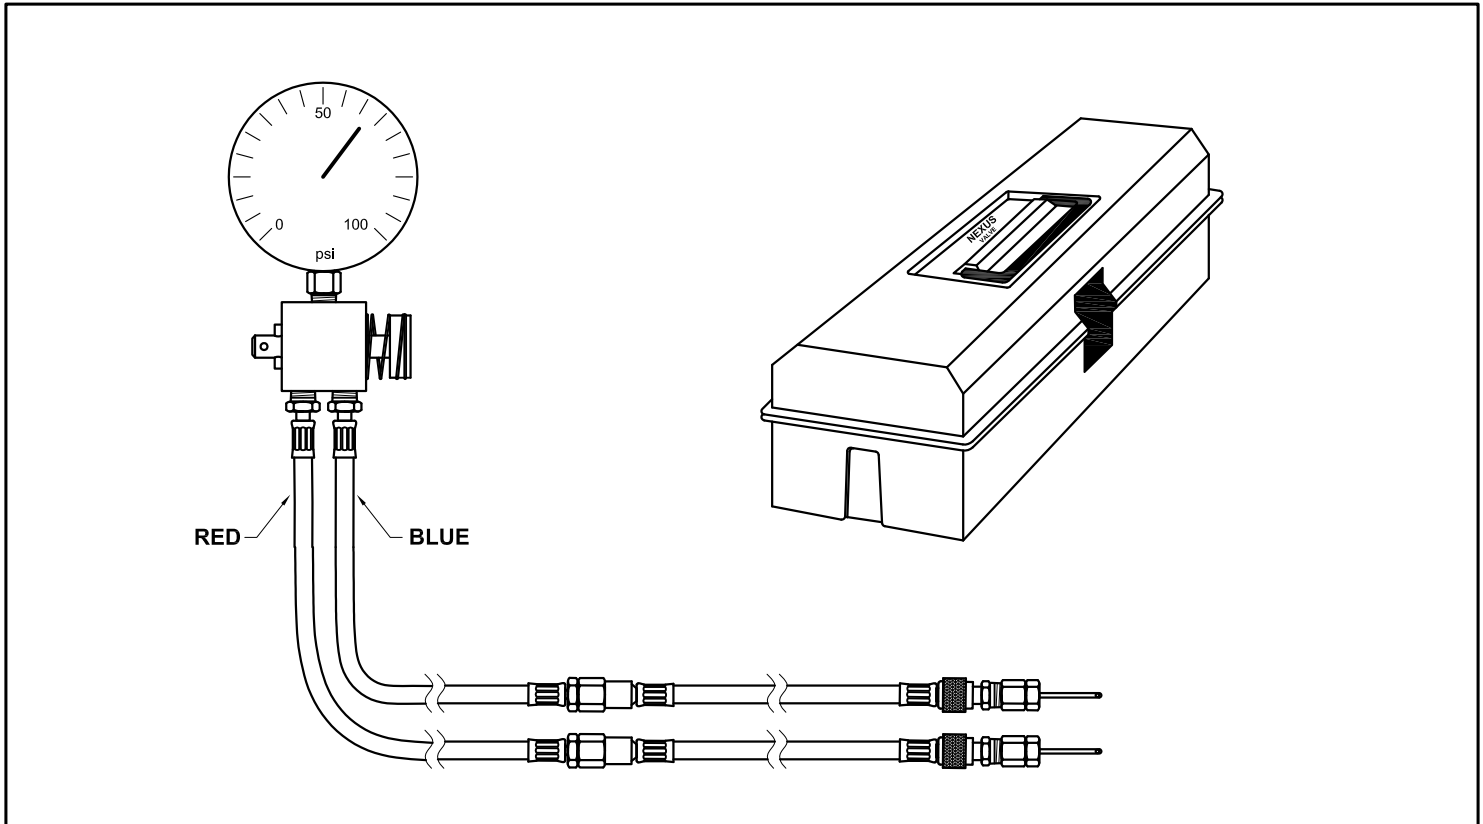

STANDARD MATERIAL SPECIFICATIONS

GAUGE	CASE, RING: LENS: DIAL: CONNECTION: ACCURACY: RANGE: MAX. OPERATING PRESSURE: OPERATING TEMPERATURE RANGE:	STAINLESS STEEL ACRYLIC 4" FACE, ALUMINUM, GLYCERINE FILLED 1/4" NPT 3-2-3% - ANSI B40.1, GRADE B 0 - 100 psi/bar 500 PSIG (34.7 bar) 32°F Min. to 200°F Max.
CARRYING CASE	MOLDED PLASTIC, RED	
HOSES	5 Ft. LONG (RED & BLUE), NITRILE JACKET AND LINER	
END FITTINGS	SCHRADER 1/4" BRASS COUPLERS AND PT PROBE ADAPTERS	
FILTERS	TEST KIT IS PROTECTED WITH 90 MICRON FILTERS TO MINIMIZE PLUGGING WITH SCALE, SAND, ETC. ELEMENTS CAN BE CLEANED OR REPLACED.	

ORDER DATA

Part #: MKA

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____