




NEXUS

NexLok™ Adapters, Couplings, Elbows, Tees

(½" thru 1")

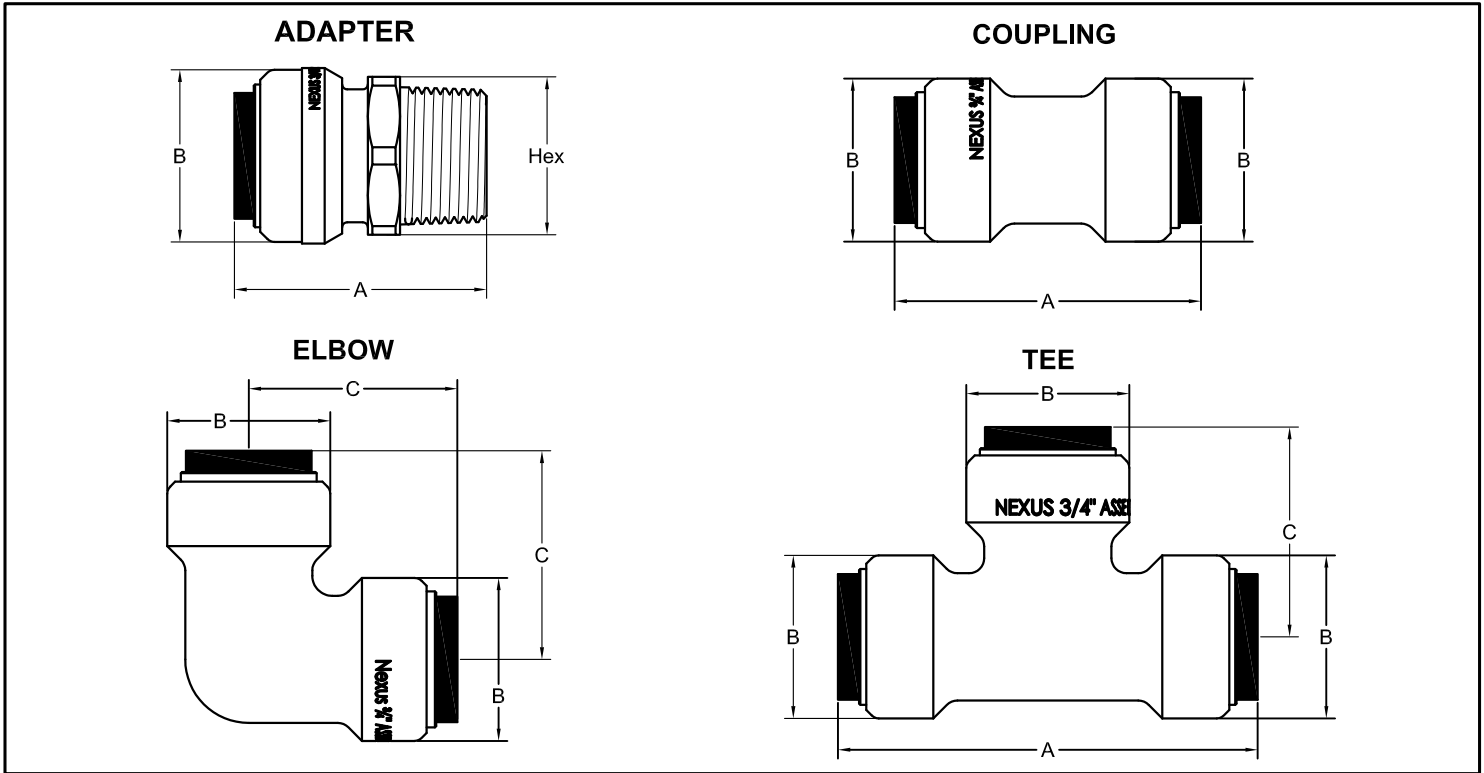

DIMENSIONS [inches]								
	Nexus Part No.	SIZE	ID	A	B	C	Hex	Wt. [Lbs]
Adapters	NLA-050	½"	0.55	1.84	1.06	-	1.00	0.17
	NLA-075	¾"	0.76	1.92	1.36	-	1.22	0.24
	NLA-100	1"	1.02	2.42	1.66	-	1.48	0.39
Couplings	NLC-050	½"	0.63	1.91	0.96	-	-	0.12
	NLC-075	¾"	0.88	2.40	1.28	-	-	0.20
	NLC-100	1"	1.15	2.62	1.65	-	-	0.36
Elbows	NLE-050	½"	0.55	-	1.06	1.32	-	0.15
	NLE-075	¾"	0.83	-	1.28	1.63	-	0.26
	NLE-100	1"	1.10	-	1.65	1.93	-	0.52
Tees	NLT-050	½"	0.59	2.63	0.96	1.32	-	0.22
	NLT-075	¾"	0.83	3.28	1.28	1.64	-	0.36
	NLT-100	1"	1.10	3.86	1.65	1.93	-	0.68

MATERIALS & DESIGN DATA	
FITTING BODY:HOT FORGED BRASS ASTM B283, 600 WOG, 325°F
PRO CARTRIDGE RING:HOT FORGED BRASS ASTM B283, 600 WOG, 325°F
O-RING:PRE-LUBRICATED EPDM
DEMOUNTING RING:ACETAL RESIN, BLACK
GRAB RING:STAINLESS STEEL
ALIGNMENT RING :NYLON 6%, BLACK
SIZES:½" thru 1"
TEMPERATURE:32°F - 200°F
PRESSURE:250 PSI
NexLok™ FITTING:COMPLIANT to ASSE 1061-2011

ORDER DATA							
Adapters		Couplings		Elbows		Tees	
QTY	Part #	QTY	Part #	QTY	Part #	QTY	Part #
	NLA-050		NLC-050		NLE-050		NLT-050
	NLA-075		NLC-075		NLE-075		NLT-075
	NLA-100		NLC-100		NLE-100		NLT-100

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____


DATE _____



NEXUS

NexLok™ LD Adapters, Couplings, Elbows, Tees

(1¼" thru 2")

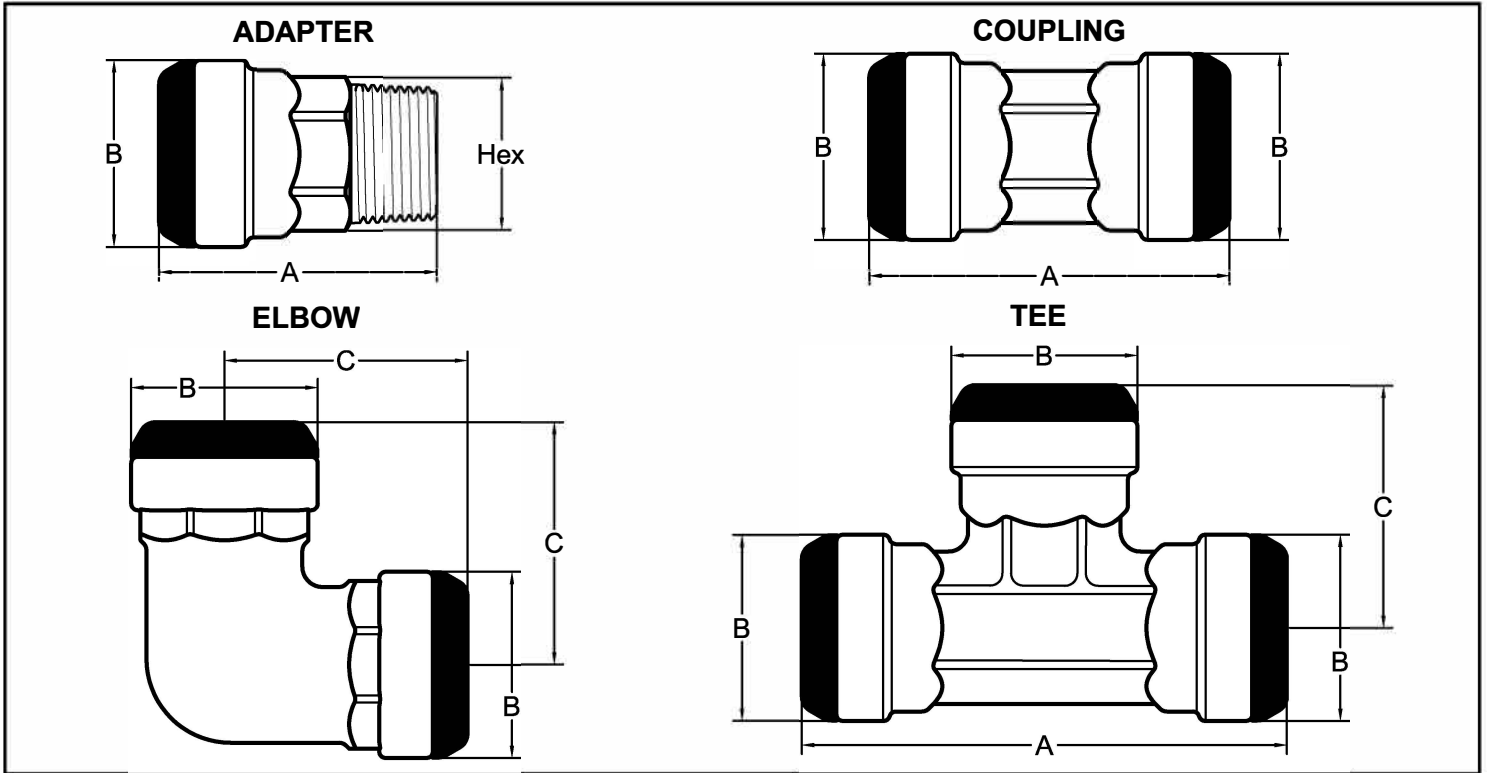

DIMENSIONS [inches]							
	Nexus Part No.	SIZE	ID	A	B	C	Wt. [Lbs]
Adapters	NLA-125	1¼"	1.30	3.27	2.33	-	0.95
	NLA-150	1½"	1.47	3.47	2.76	-	1.16
	NLA-200	2"	1.95	3.70	3.22	-	1.43
Couplings	NLC-125	1¼"	1.39	4.52	2.33	-	1.41
	NLC-150	1½"	1.64	4.95	2.76	-	1.72
	NLC-200	2"	2.14	5.48	3.22	-	2.16
Elbows	NLE-125	1¼"	1.39	-	2.33	3.04	1.93
	NLE-150	1½"	1.47	-	2.76	3.37	2.94
	NLE-200	2"	1.95	-	3.22	3.90	3.68
Tees	NLT-125	1¼"	1.39	6.08	2.33	3.04	2.59
	NLT-150	1½"	1.47	6.72	2.76	3.37	3.46
	NLT-200	2"	1.95	7.80	3.22	3.90	4.64

MATERIALS & DESIGN DATA	
FITTING BODY:HOT FORGED BRASS ASTM B283, 600 WOG, 325°F
O-RING:PRE-LUBRICATED EPDM
SCREWED END CAP:ACETAL RESIN, BLACK
GRAB RING:STAINLESS STEEL
ALIGNMENT RING :NYLON 6/6, BLACK
SIZES:1¼" thru 2"
TEMPERATURE:32°F - 200°F
PRESSURE:200 PSI
NexLok™ FITTING:COMPLIANT to ASSE 1061-2011

ORDER DATA							
Adapters		Couplings		Elbows		Tees	
QTY	Part #	QTY	Part #	QTY	Part #	QTY	Part #
	NLA-125		NLC-125		NLE-125		NLT-125
	NLA-150		NLC-150		NLE-150		NLT-150
	NLA-200		NLC-200		NLE-200		NLT-200

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____