




UltraFlex™ Model UFH Flexible Connector (2½")

UFH-250M-250M

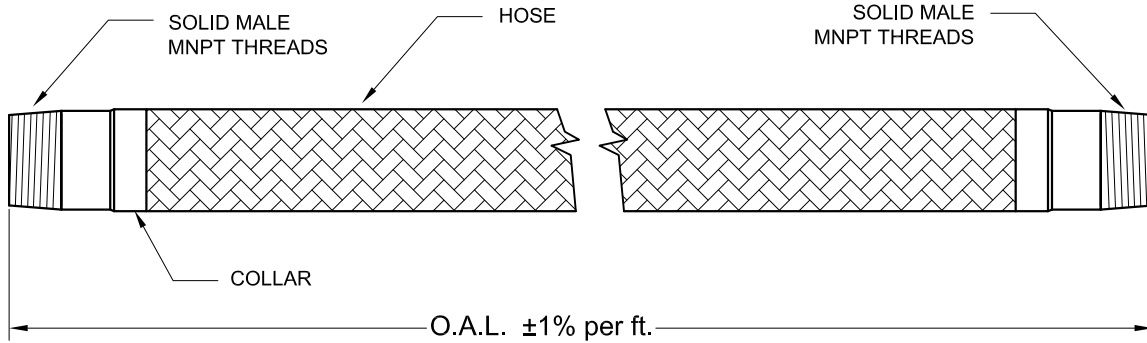

DIMENSIONS [inches]

	SIZE	O.A.L.	CONNECTIONS	WT [Lbs]	
				24	36
M	2½"	24, 36	2½"M x 2½"M	5.9	8.0

SPECIFICATIONS

	SIZE	Min. Bend RADIUS (1)	WORKING Press. [PSI]	TEMP [°F]	THREAD [Pitch/IN]	Cv	
						24"	36"
M	2½"	9½"	400	70°	8	68.0	65.0

NOTES: (1) Bend Radius measured on connector centerline

TEMPERATURE DERATING FACTORS Multiply X Working PSIG

200°F	250°F	300°F	350°F	400°F	500°F	600°F	700°F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.70

ORDER DATA

Sample Part #:

UFH - 250 - 24

Model
UFH (2½")

Line Size
250 = 2½"

Connector Length
24" or 36"

MATERIALS

Hose: Stainless Steel
Collar: T-304 Stainless Steel
Braid: Stainless Steel
Fitting: Sch. 40 Carbon Steel

DESIGN DATA

- 1) These connectors are fire rated.
Applicable Standard: ASTM E 84-00
(NFPA 255, ANSI/UL 723 & UBC 8-1)
- 2) These connectors are designed for water only;
Not intended for natural gas or gasoline applications.
- 3) Lateral Offset: max. ¼".

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____