




Coil Pak™ M2TN (2½")

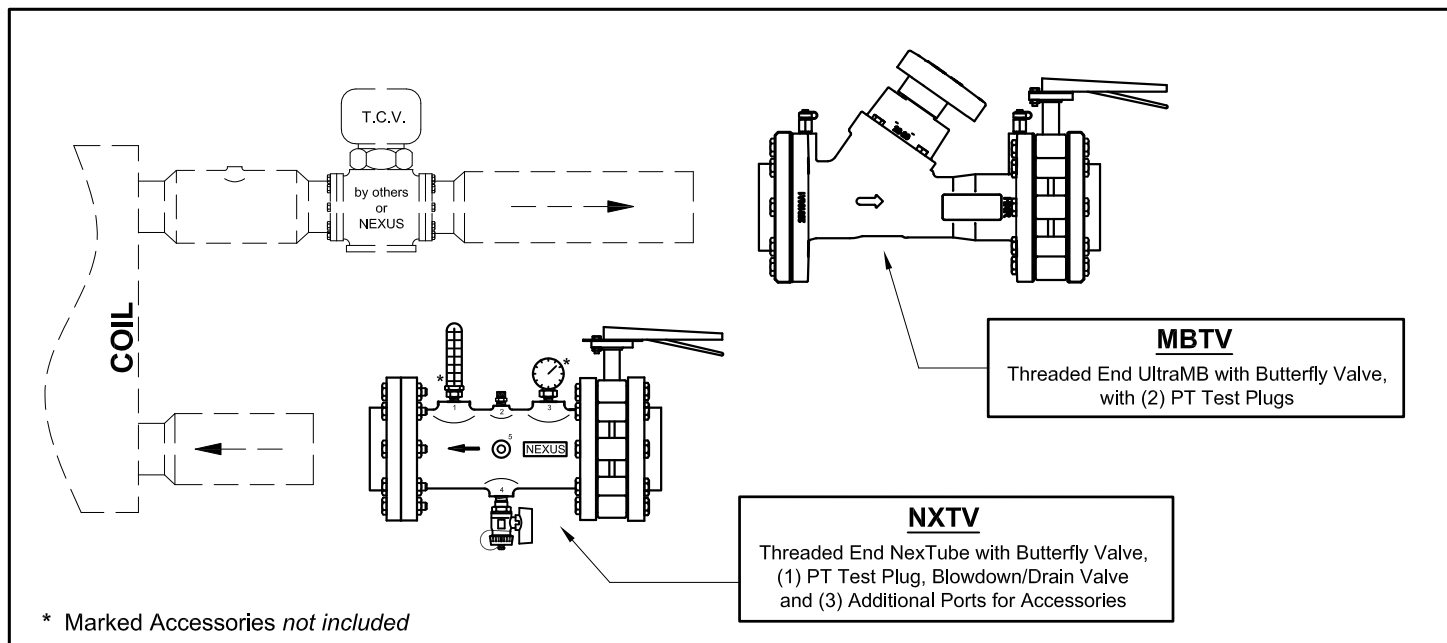

MATERIALS & DESIGN DATA

BODYCAST IRON, ASTM A126, CLASS B 232 PSIG, 250°F STANDARD 125# CLASS B FLANGES
CAPCAST IRON
LIMITING SCREWBRASS C36000
STEMBRASS C36000
RETAINING RINGBRASS, ASTM B16 C36000
SPRINGSTAINLESS STEEL 302
O-RINGSEPDM
HANDWHEELPOLYAMIDE
POSITION INDICATORPOLYAMIDE
OBTURATORCOMPOSITE
SEALEPDM
SCREWSSTAINLESS STEEL
GLOBERYTON (PPS)
NEXTUBECAST IRON BODY, ASTM A126, CLASS B, 175 PSIG, 250°F, STANDARD 125# CLASS B FLANGES (MATES TO 150# FLANGES ALSO)
BUTTERFLY VALVEEPOXY COATED CAST IRON, ASTM A126, CLASS B, LUG TYPE BUTTERFLY VALVE, 225 PSIG, 250°F, 304 STAINLESS STEEL DISK, 416 STAINLESS STEEL SHAFT
THREADED ADAPTERSDUCTILE IRON, ASTM A395, 175 PSIG, 250°F, STANDARD 125# CLASS B FLANGES
BOLTSZINC PLATED STEEL
ACCURACY±5%

FLOW RATE RECOMMENDATION GUIDE

SIZE [inches]	IDEAL FLOW RANGES [GPM]		Handwheel Turns
	Min.	Max.	Max. (functional)
2½	1.1	160.0	9

ACCESSORIES

	Order Code	Part No.	Description
	<input type="checkbox"/> A AV-025.	AUTOMATIC AIR VENT 250°F, 150 PSIG, positive shut-off, ¼" MNPT
	<input type="checkbox"/> H HT.	HANGING TAG with Model No., Location, Flow Rates (Maximum 7 Characters)
	<input type="checkbox"/> V MV-025.	MANUAL AIR VENT 325°F, 400 PSIG, ¼" MNPT, Side Discharge
	<input type="checkbox"/> W TW-075.	THERMOMETER WELL ¾" MNPT
	<input type="checkbox"/> X MV-025L.	MANUAL AIR VENT EXTENDED 325°F, 400 PSIG, ¼" MNPT, Side Discharge, 2¼" O.A.L.
	 PTE.	PRES / TEMP TEST PLUG EXTENSION 1½" O.A.L.

ORDER DATA

Sample Part #:

M2TN0250-00110X

Model _____
Coil Pak Size _____
0250 = 2½"
Flow Rate (GPM) _____
Extended Accessories (ES) _____
Port Accessories (Return Side) _____
Port Accessories (Supply Side) _____
Option Order Codes (HT) _____

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____

M2TN coil paks include base model UltraMB & NexTube.
Additional accessories and options may be ordered separately.