




Coil Pak™ B2TY (2½")

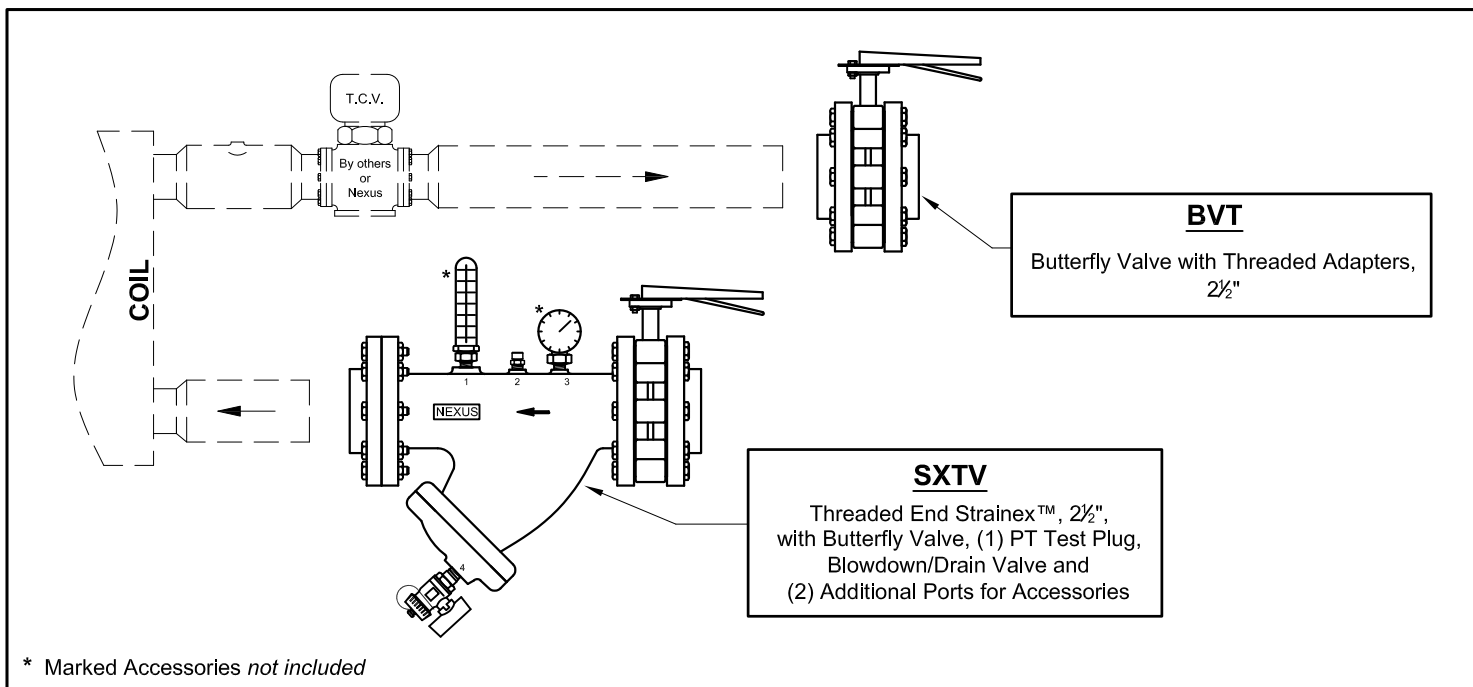

MATERIALS & DESIGN DATA

STRAINEX:	GRAY CAST IRON BODY and END CAP, ASTM A48, CLASS 30, 175 PSIG, 250°F STANDARD 125# CLASS B FLANGES (MATES TO 150# FLANGES ALSO)
SCREEN:	304 S.S., ASTM A167 SIZES OPENINGS 2½" 0.045 perf
BUTTERFLY VALVE:	EPOXY COATED CAST IRON, LUG TYPE BODY, ASTM A126, CLASS B, 225 PSIG, 250°F, EPDM SEAT, 304 STAINLESS STEEL DISK, 416 STAINLESS STEEL SHAFT, ON-OFF w/ HANDLE
BOLTS:	ZINC PLATED STEEL
THREADED ADAPTERS:	DUCTILE IRON, ASTM A395, 175 PSIG, 250°F, STANDARD 125# CLASS B FLANGES

ACCESSORIES

	Order Code	Part No.	Description
	<input type="checkbox"/> H HT.	HANGING TAG with Model No., Location, Flow Rates (Maximum 7 Characters)
	<input type="checkbox"/> W TW-075.	THERMOMETER WELL ¾" MNPT
	<input type="checkbox"/> X PTE.	PRES / TEMP TEST PLUG EXTENSION 1⅞" O.A.L.

ORDER DATA

Sample Part #:

B 2 T Y 0 2 5 0 - - - - - X

Model

Coil Pak Size

250=2½"

Extended Accessories (ES)

Port Accessories (Return Side)

Port Accessories (Supply Side)

Option Order Codes (HT)

B2TY coil paks include base model Strainex.
Additional accessories and options may be ordered separately.

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____